

INSTALLATION INSTRUCTIONS

FRONT SEATS



1) Remove Headrest

- button
- pin hole (use paper clip)
- non-removable headrests require Velcro at factory



2) Slide on Hood

- line up seat cover seams with seat



3) Center Straps

- push center straps through tuck of seat
- you may have to remove hooks if clearance is tight




4) Fit Bottom

- line up seat cover seams with seat seams




5) Secure Fastening System

- low seat clearance - use wire coat hanger or installation tool
- avoid hooking straps to wires or mechanized parts

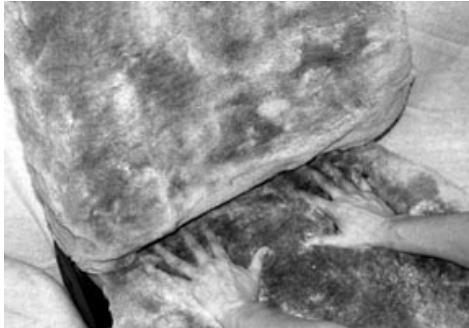

6) Adjust Seat Cover

- push and tuck seat cover for a finished look
- with use, your seat cover will further contour to your seat

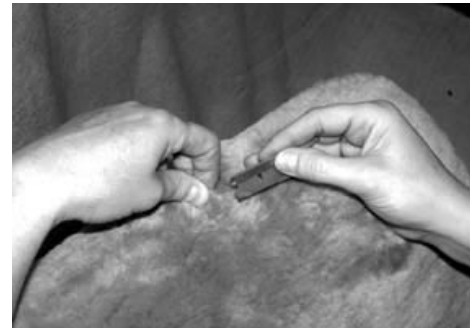

7) Install Headrests

- lift top of seat cover up and carefully cut a small hole(s) side to side slightly bigger than post(s)
- insert headrest post(s) into post guides
- Velcro tops - notch Velcro for headrest post(s) if applicable

PLEASE
ENJOY!

SIDE IMPACT AIR BAGS

**SEAT COVER HAS
BEEN ALTERED FOR
SEAT MOUNTED SIDE
IMPACT AIR BAGS**